


MANUAL OF INSTRUCTIONS DIGITAL COUNTER JUICERS F-50 C / F-50 AC

(Please follow these instructions to get the best functioning)

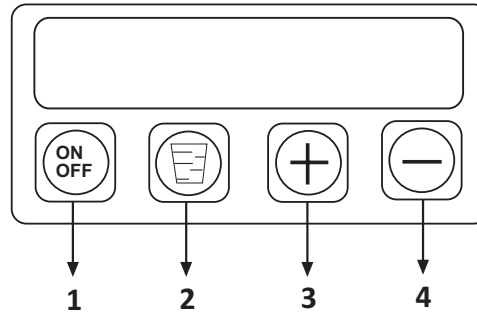

FUNCTION OF THE BUTTONS :

1. Switch the counter On and Off. You will activate the counter just pressing and the last action we have made will be showed. Pressing again this button, the counter will be swichted off.

3. Increase the number of oranges from 1 to 9. After that, we will pass to the continuous mode and, if we press it one more time, the number 1 will appear again. If we press it at the same time than the negative button we could see the total number of squeezed oranges. This number will be showed during the next 2 seconds. This action can only be carred out when the counter is activated and the motor is not working.

2. Glass Button. This button will make the motor of the juicer to come into operation. The motor will stop when the number or oranges showed on the screen be 0 or if the operator presses this button again. in both cases, the decreasing counting will start again. If we have programme the counter with the continuous mode CoM it will only stop if we press this button again. The oranges' counting will be carred out in an increasing way.

4. Decrease the number of oranges from 9 to 1. After that, we will pass to the continuous mode and, if we press it one more time, the number 9 will appear again. If we press it at the same time than the positive button we could see the total number of squeezed oranges.

FUNCTIONING OF THE COUNTER

1.- Plug the machine to the electrical supply and press the machine on/off button that is in one side of the machine. We will have to press also the automatic feeder button for tthe model F- 50 AC; it is also in one side of the machine.

2.- Press to **ON-OFF counter button**

3.- Pressing the "+" button we will select the number of oranges we want to squeeze. Then we will select from 1 to 9. If we go further than 9, we will select the continuous mode that will be showed on screen with the icon **CoM**. To decrease the number of oranges selected, we will press the " - " button .

4.- Once we hace selected the quantity we need, we will press the "glass" button; then the machine will start to work.

** To cancel the squeezing process, press again the glass button **

** After 20 seconds without squeezing, the machine will stop automatically **

** To know exactly how many oranges we have squeezed, we will press + and - for some seconds at the same time **